
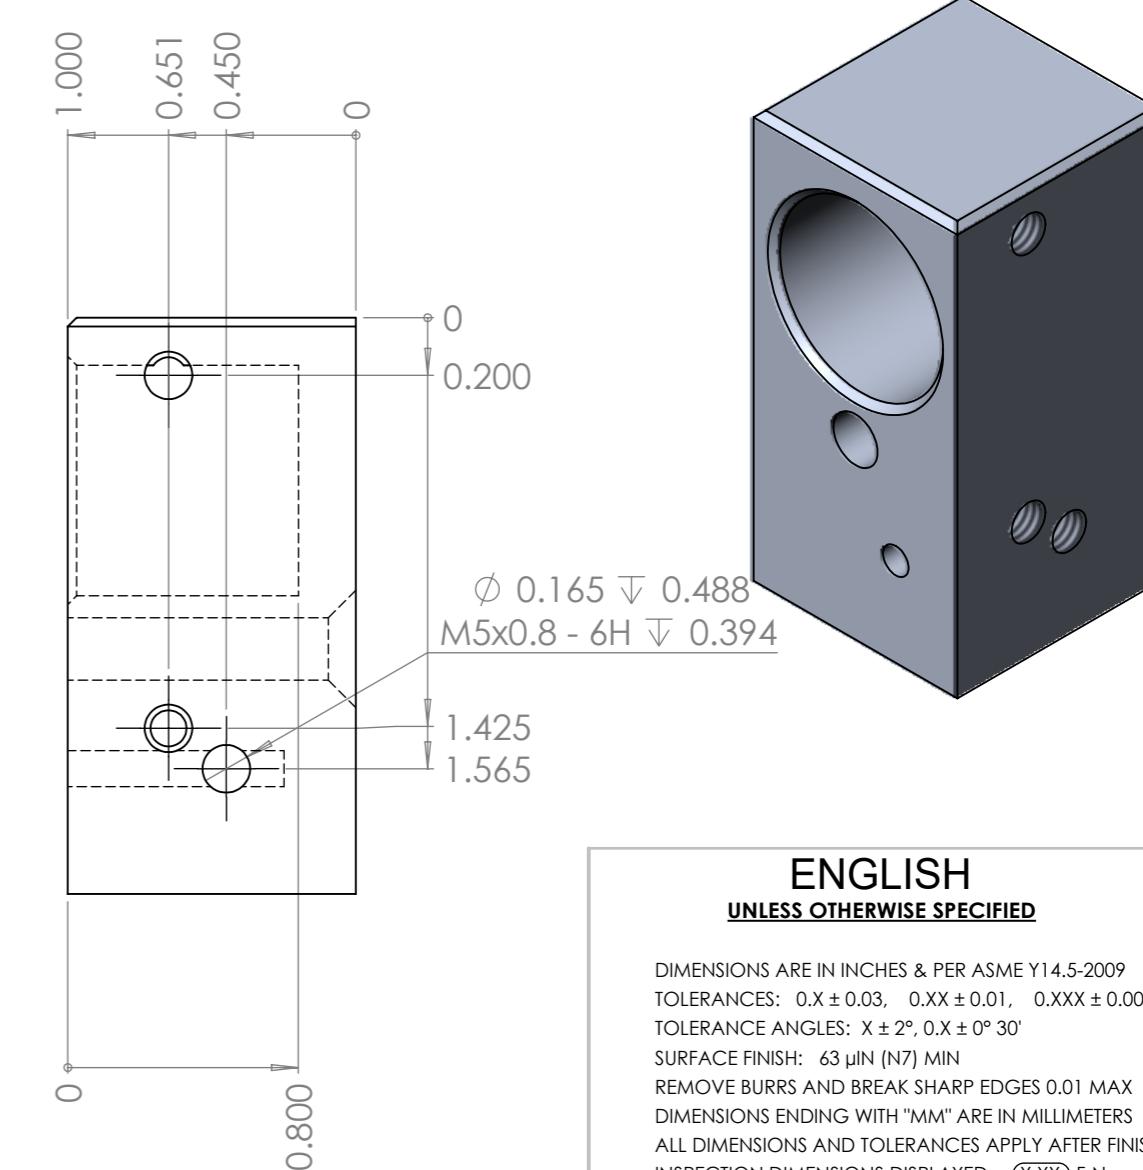


## NOTES:

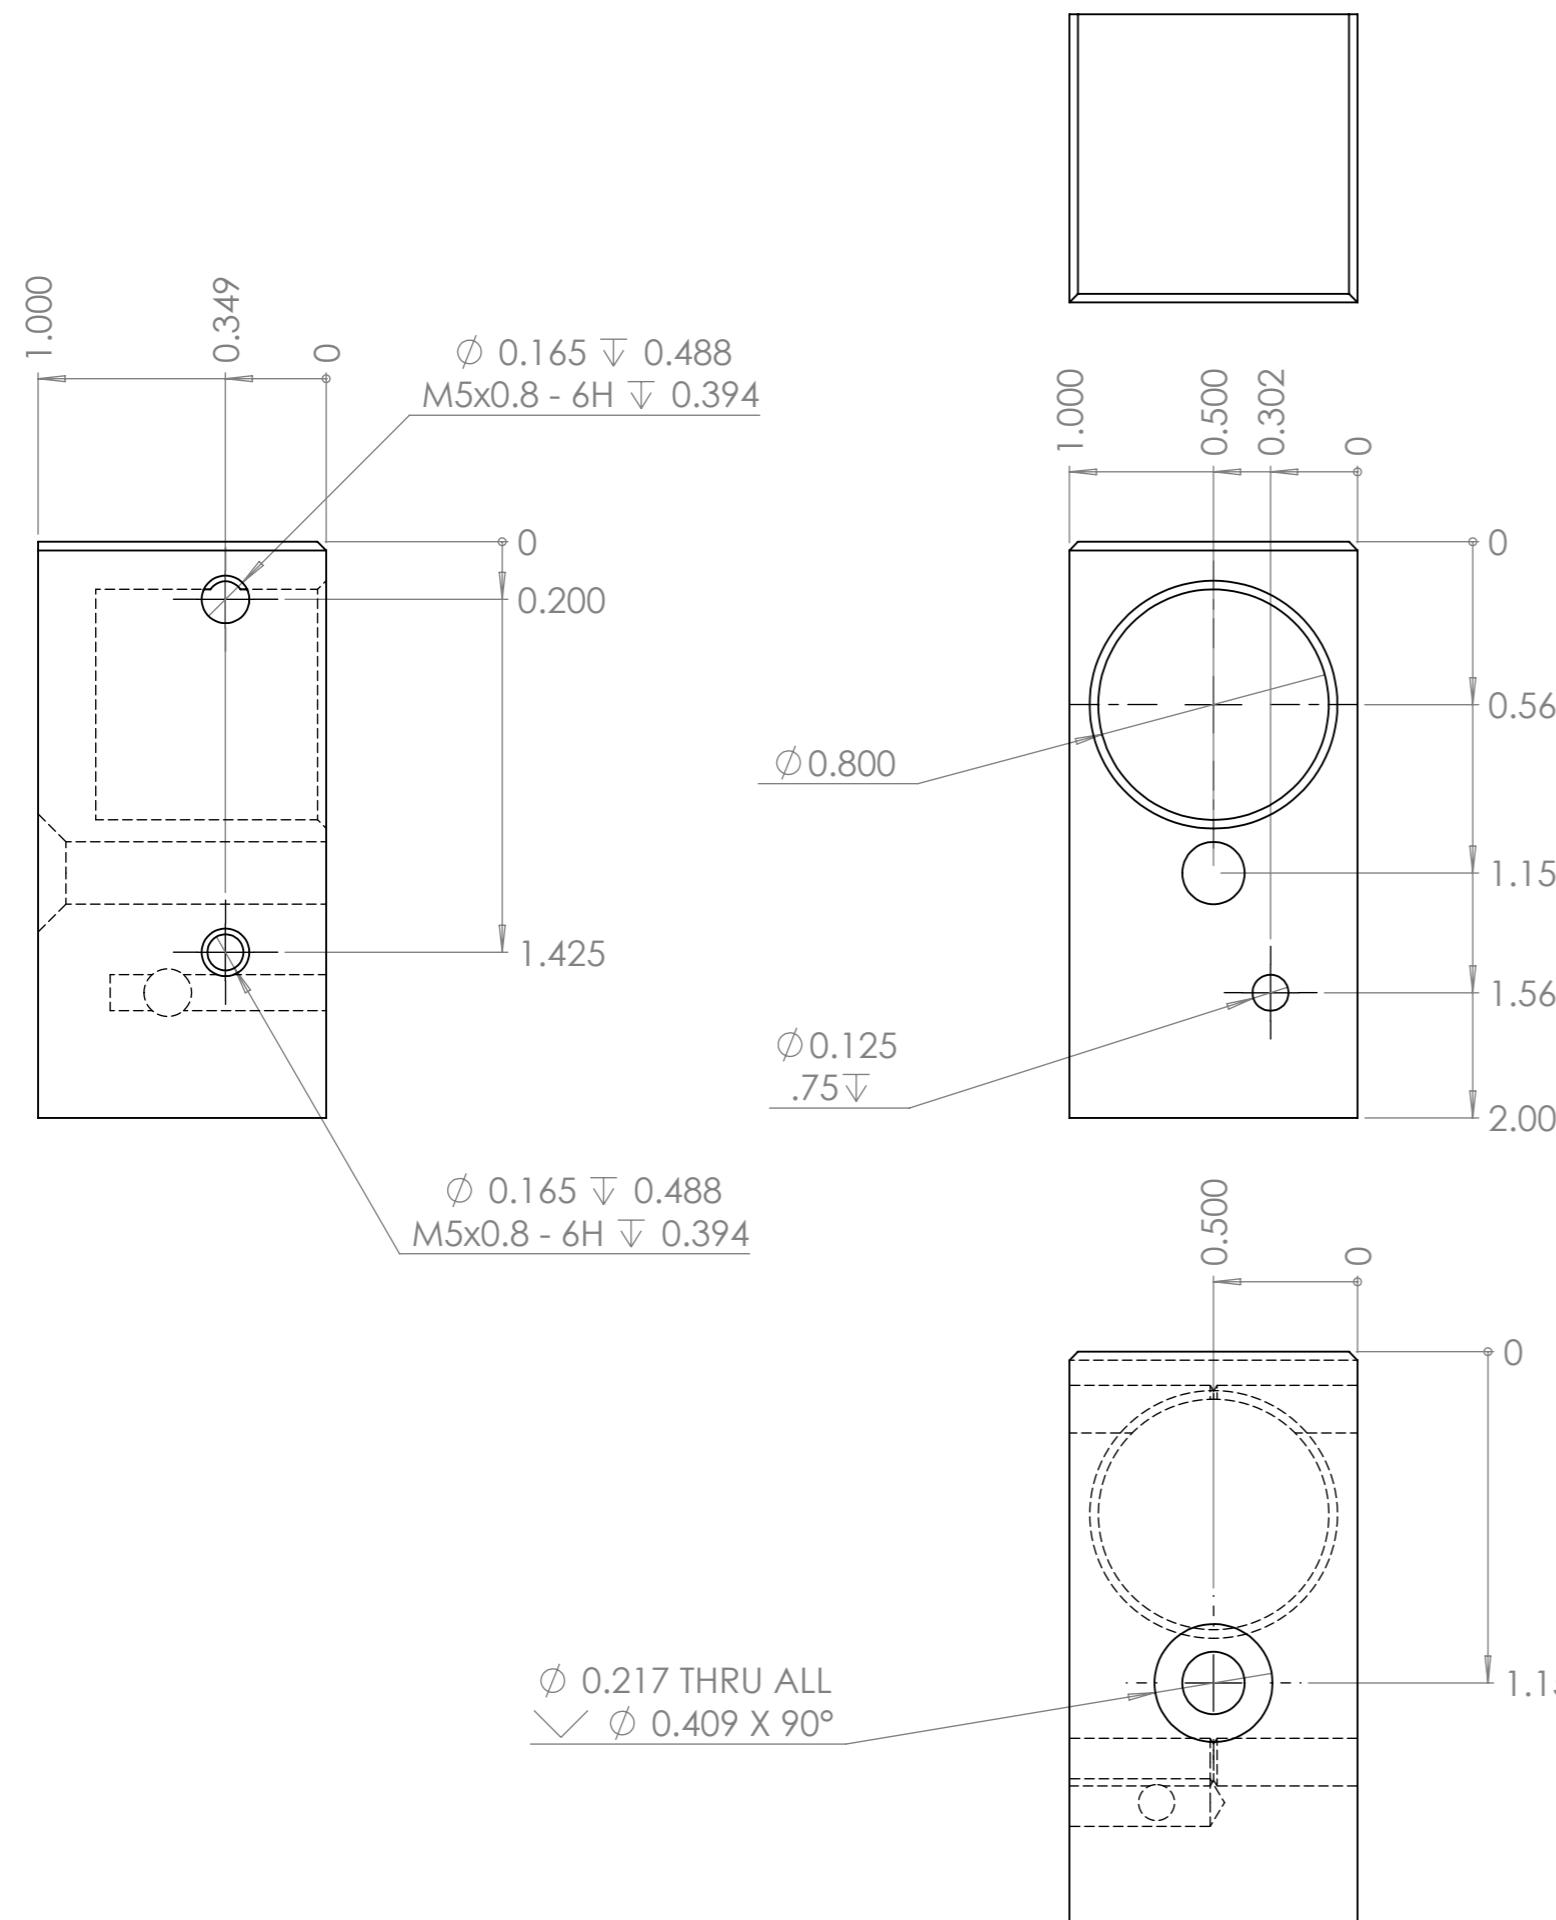

## ENGLISH

**UNLESS OTHERWISE SPECIFIED**

DIMENSIONS ARE IN INCHES & PER ASME Y14.5-2009  
TOLERANCES:  $0. X \pm 0.03$ ,  $0. XX \pm 0.01$ ,  $0. XXX \pm 0.005$   
TOLERANCE ANGLES:  $X \pm 2^\circ$ ,  $0. X \pm 0^\circ 30'$   
SURFACE FINISH:  $63 \mu\text{in}$  (N7) MIN  
REMOVE BURRS AND BREAK SHARP EDGES 0.01 MAX  
DIMENSIONS ENDING WITH "MM" ARE IN MILLIMETERS  
ALL DIMENSIONS AND TOLERANCES APPLY AFTER FINISHING  
INSPECTION DIMENSIONS DISPLAYED: (X.XX) F-N  
CONTROLLED FEATURES DISPLAYED: (X.XX) C-N  
SEE PURCHASE ORDER FOR INSPECTION INSTRUCTIONS

THIS MATERIAL IS THE PROPERTY OF EVERYONE.  
NO RIGHTS ARE GRANTED TO USE SUCH MATERIAL  
FOR ANY PURPOSE OTHER THAN FURNISHING OF  
SERVICE AND SUPPLIES TO EVERYONE.

TITLE: Recoil Spring Block

Material:	6061-T6 (SS)	Finish:	
DRAWN:	wildcat_A	DATE:	11/1/2020
CHECKED:	wildcat_A	DATE:	11/1/2020
ENGINEER:	wildcat_A	DATE:	11/1/2020
		SCALE:	3:2
ELECTRONIC FILE:		Recoil spring block.SLDDRW	
SIZE	DRAWING NO.		REV
B			01

## GEOMETRIC DRAWING SYMBOLS

○	CIRCULARITY	▽	COUNTER SINK	▷	PROF OF A SURFACE
◎	CYLINDRICITY	└	COUNTER BORE	↙	ANGULARITY
XX	BASIC DIM	□	SQUARE	_	PERPENDICULARITY

## GEOMETRIC DRAWING SYMBOLS:

- (M) MAX MATERIAL CONDITION
- (A) TOTAL RUNOUT
- (P) PROJECTED TOLERANCE Z

- CONCENTRICITY
- PROFILE OF A L
- DIAMETER

- // PARALLELISM
- STRAIGHTNESS
- FLATNESS

A horizontal number line with tick marks every 1 unit, labeled from 0 to 100. A point is marked at 2. The region from 0 to 100 is shaded with a gray color.