
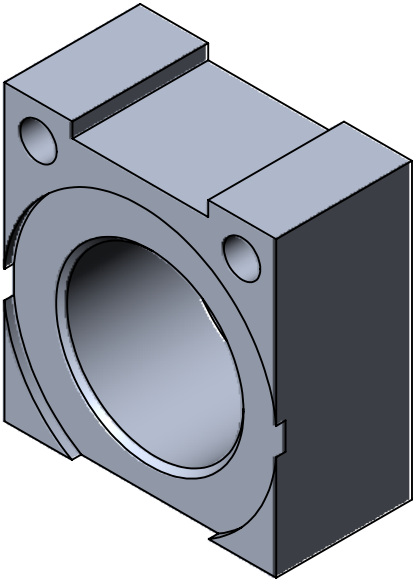


NOTES:

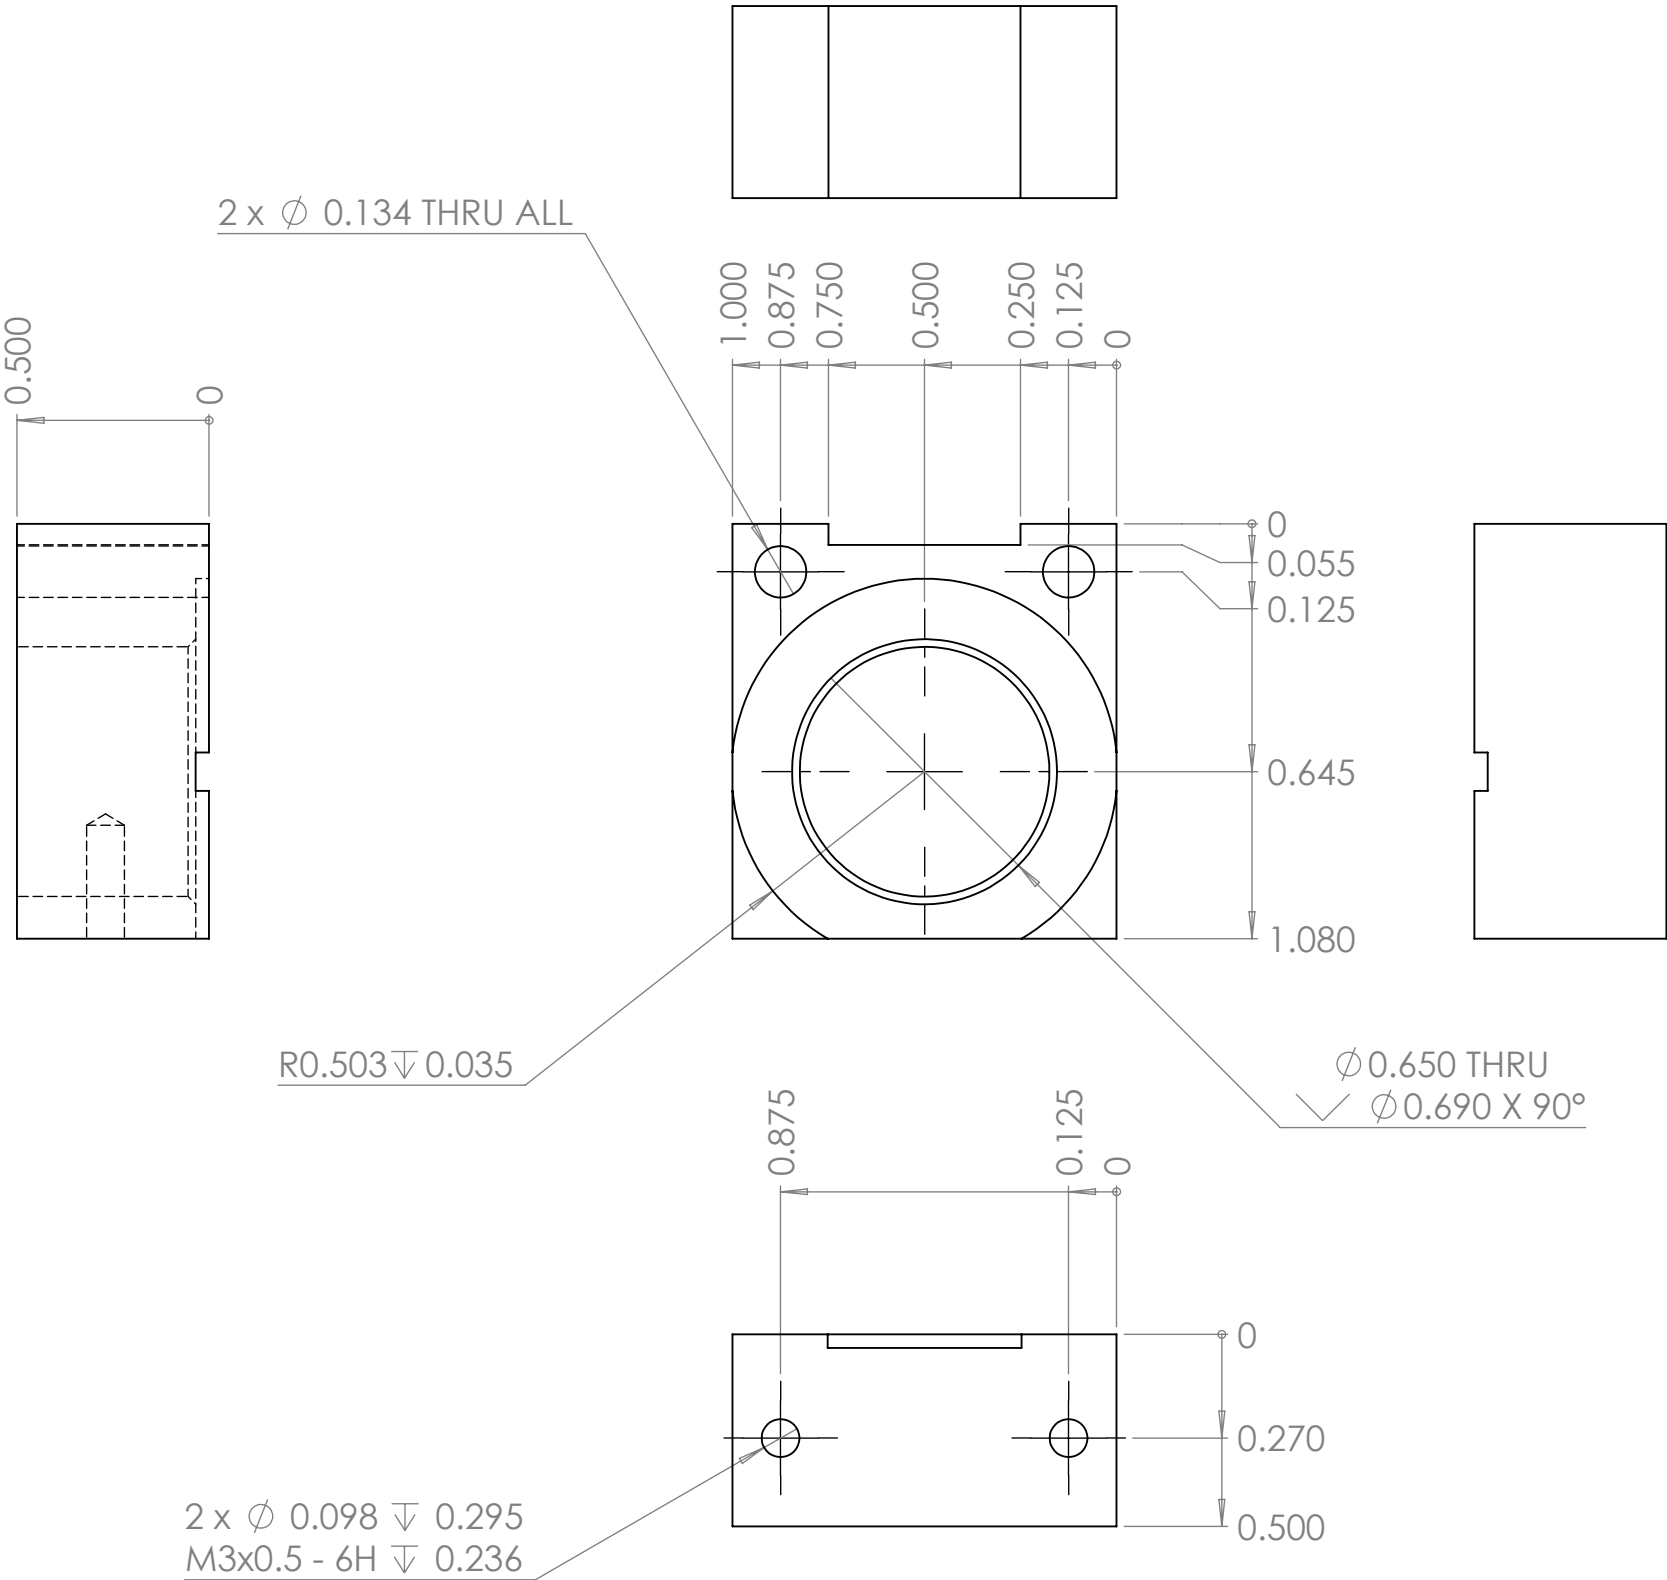

ENGLISH
UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES & PER ASME Y14.5-2009
TOLERANCES: 0.X ± 0.03, 0.XX ± 0.01, 0.XXX ± 0.005
TOLERANCE ANGLES: X ± 2°, 0.X ± 0° 30'
SURFACE FINISH: 63 µIN (N7) MIN
REMOVE BURRS AND BREAK SHARP EDGES 0.01 MAX
DIMENSIONS ENDING WITH "MM" ARE IN MILLIMETERS
ALL DIMENSIONS AND TOLERANCES APPLY AFTER FINISHING
INSPECTION DIMENSIONS DISPLAYED: (X.XX) F-N
CONTROLLED FEATURES DISPLAYED: (X.XX) C-N
SEE PURCHASE ORDER FOR INSPECTION INSTRUCTIONS

THIS MATERIAL IS THE PROPERTY OF EVERYONE.
NO RIGHTS ARE GRANTED TO USE SUCH MATERIAL
FOR ANY PURPOSE OTHER THAN FURNISHING OF
SERVICE AND SUPPLIES TO EVERYONE.

TITLE: barrel block clamp

Material:	6061-T6 (SS)	Finish:	
DRAWN:	wildcat_A	DATE:	11/1/2020
CHECKED:	wildcat_A	DATE:	11/1/2020
ENGINEER:	wildcat_A	DATE:	10/1/2020
		SCALE:	2:1
ELETRONIC FILE:	barrel block clamp green river.SLDDRW	SHEET:	1 of 1

SIZE	DRAWING NO.	REV
B		01

GEOMETRIC DRAWING SYMBOLS:

CIRCULARITY	COUNTER SINK	PROF OF A SURFACE	MAX MATERIAL CONDITION	CONCENTRICITY	PARALLELISM
CYLINDRICITY	COUNTER BORE	ANGULARITY	TOTAL RUNOUT	PROFILE OF A LINE	STRAIGHTNESS
BASIC DIM	SQUARE	PERPENDICULARITY	PROJECTED TOLERANCE ZONE	DIAMETER	FLATNESS

2

0

1

2

3

0

10

20

30

40

50

60

70

80

90

100