

RECESSION RUGER

+

•

o

UberClay

PARTS MODIFICATIONS



Remove the firing pin block
File the slide lock catch back

Removing the firing pin block

The Ruger P89 has an internal firing pin block that must be removed for this build to function. The slide safety and the FCG safety will both still function.



Removing the firing pin block


- Locate the set screw in the top of the rear sight
- Remove this screw and set it aside somewhere safe



Removing the firing pin block

- Drive the rear sight partially out to expose the firing pin block
- Flip the slide safety down
- Gently pull the block straight up and out



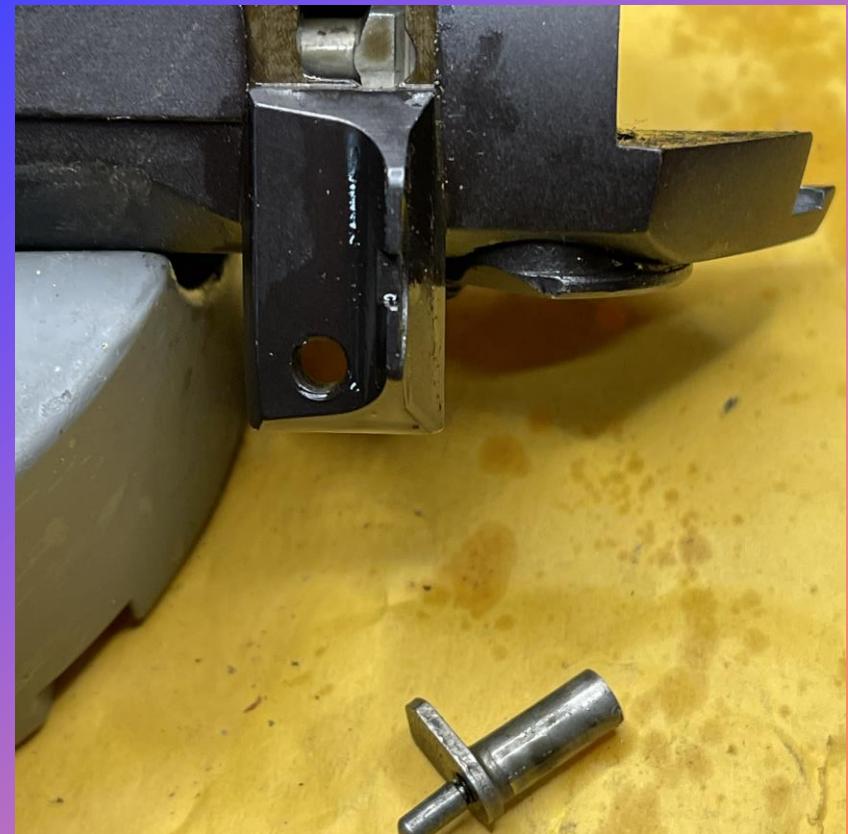

Removing the firing pin block

- Drive the rear sight back into place
- Reinstall the set screw

Filing down the slide lock



- The Ruger P89 OEM mags have a slot in them that the slide lock sits in. Glock mags do not have this, so you will need to file your slide lock down.
 - The slide will not lock back when the mag is empty
 - Take a file and remove approximately 1/8" of the end of the slide lock